Low-cost Flowmeter

MODEL RK1700 SERIES

Low-cost model using SUS316 material

- ☐ Very reduced price
- ☐ Compact design

RK1700 V

Notes:

- ☐ Operating temperature is 20°C (at atmospheric pressure).
- ☐ The needle is located at the bottom. (Standard specification)

Standard Specifications

Fluids	Use for Air, N_2 and O_2 exclusively
Flow range (Full scale)	1L, 5L, 10L, 30L, 50L/MIN (AT20°C)
Accuracy	FS±7%
Available scale	10:1
Supply pressure	under 0.3MPa
Proof pressure	0.5MPa
Temperature resistance	MAX. 60°C
Materials	SS: SUS 316, Hard glass, FKM, SUS 304, SUS 303 BS: Brass, Hard glass, NBR, SUS303
Connection	Rc1/4

Dimensions

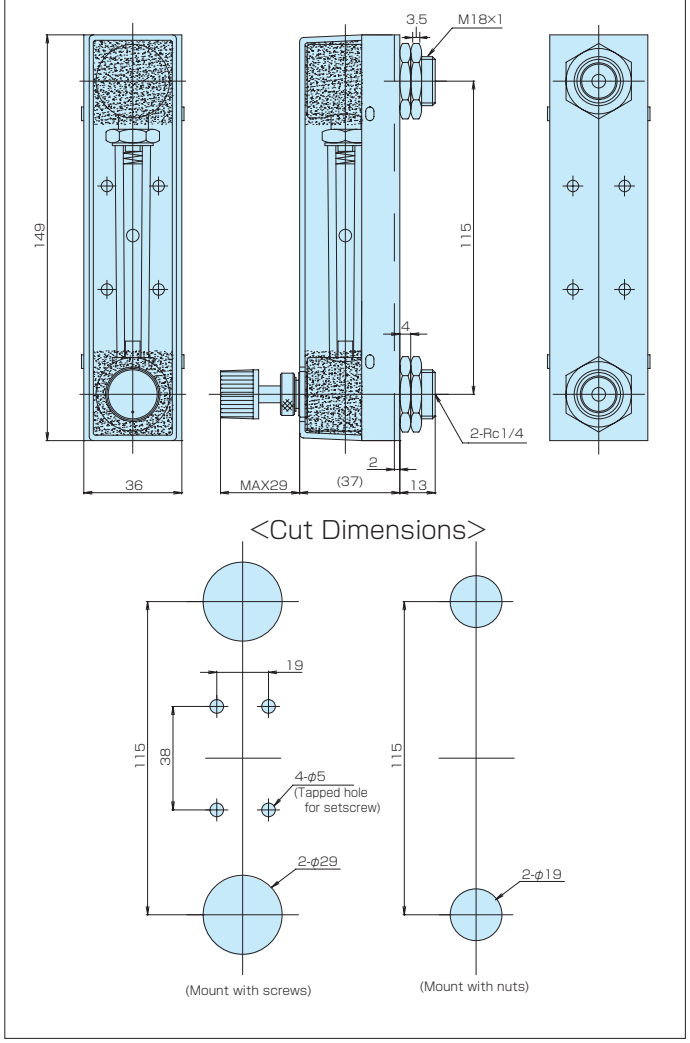

Ordering

【without valve type】

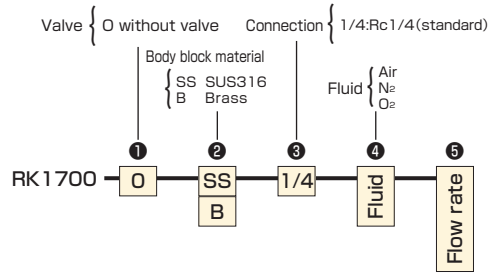

【with valve type】

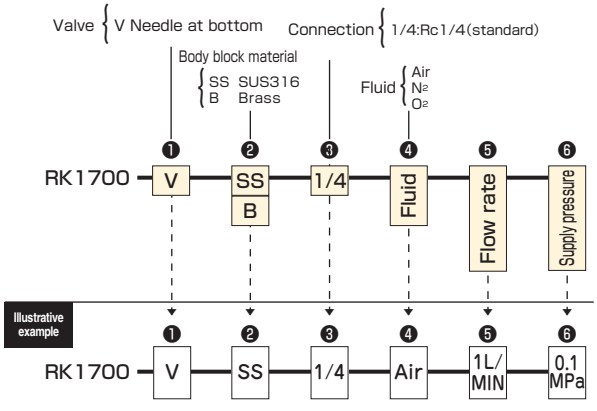

* Refer to “Ordering” and “Illustrative example” when placing an order or requesting a quotation. Fill in the blanks in the “Order/Quotation Request Card” at the end of the catalog, and send the card by fax.